
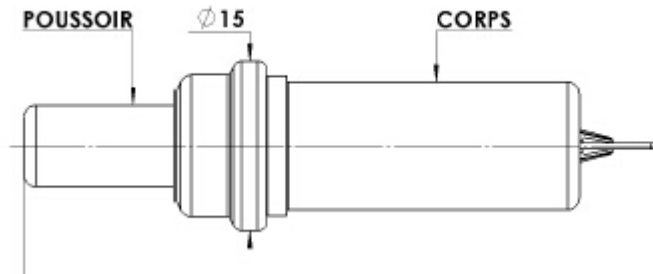



## FEATURES

- Simple, fast and convenient installation and Disassembly.
- Improves installation and removal efficiency by over 50%
- Designed specifically for use in wet sealant or liquid shim applications. The type utilizes a rectangular spring to Retain a maximum of 100lbs. of claming pressure even with minor structure thickness variations due to sealant flow
- 2.0mm through 6.3mm diameters
- Easy installation

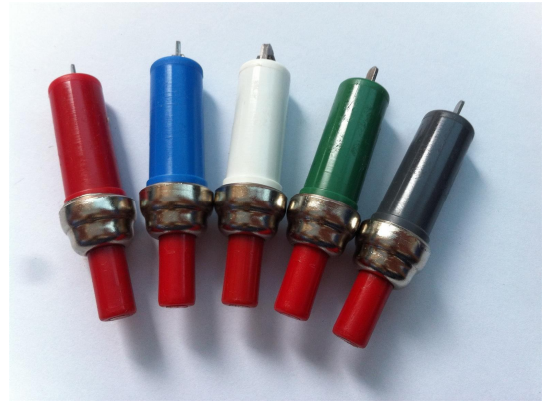

 <b>METRIC SIZES-AMS SERIES</b>				
PART NO.	Nominal DIA (MM)	HOLE DIA (MM)	GRIP RANGE (MM)	COLOR CODE
CMSMA-2.0	2.0	2.0	0~6.5	YELLOW
CMSMA-2.4	2.4	2.4	0~6.5	RED
CMSMA-2.5	2.5	2.5	0~6.5	RED
CMSMA-3.0	3.0	3.0	0~6.5	BROWN
CMSMA-3.2	3.2	3.2	0~6.5	GRAY
CMSMA-3.5	3.5	3.5	0~6.5	GREEN
CMSMA-3.6	3.6	3.6	0~6.5	GREEN
CMSMA-4.0	4.0	4.0	0~6.5	BLUE
CMSMA-4.8	4.8	4.8	0~6.5	WHITE
CMSMA-5.6	5.6	5.6	0~6.5	GREEN
CMSMA-6.3	6.3	6.3	0~6.5	BROWN