


# ◆ Threaded Shank Drills




- ◆ Very Stubby & Extra Long
- ◆ NAS965 Threaded Shank Drill
- ◆ HSS-M2 & Cobalt M35
- ◆ Split point: 118° or 135°
- ◆ Surface finish: Black

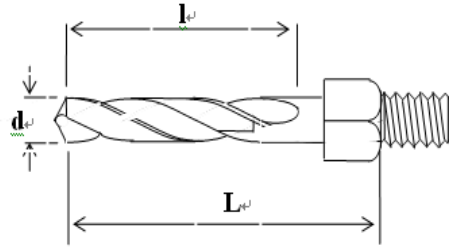

Drill Size	Decimal Equiv.	O.A.L. VERY STUBBY	O.A.L. EXTRA LONG	Part Number STUBBY	Part Number EXTRA LONG
1	0.2280	3/8	3	SA0112280	SA4112280
2	0.2210	3/8	3	SA0112210	SA4112210
3	0.2130	3/8	3	SA0112130	SA4112210
4	0.2090	3/8	3	SA0112090	SA4112090
5	0.2055	3/8	3	SA0112055	SA4112055
6	0.2040	3/8	3	SA0112040	SA4112055
7	0.2010	3/8	3	SA0112010	SA4112010
8	0.1990	3/8	3	SA0111990	SA4111990
9	0.1960	3/8	3	SA0111960	SA4111960
10	0.1935	3/8	3	SA0111935	SA4111935
11	0.1910	3/8	3	SA0111910	SA4111910
12	0.1890	3/8	3	SA0111890	SA4111890
13	0.1850	3/8	3	SA0111850	SA4111850
14	0.1820	3/8	3	SA0111820	SA4111820
15	0.1800	3/8	3	SA0111800	SA4111800
16	0.1770	3/8	3	SA0111770	SA4111770
17	0.1730	3/8	3	SA0111730	SA4111730
18	0.1695	3/8	3	SA0111695	SA4111695
19	0.1660	3/8	3	SA0111660	SA4111660
20	0.1610	3/8	3	SA0111610	SA4111610
21	0.1590	3/8	3	SA0111590	SA4111590
22	0.1570	3/8	3	SA0111570	SA4111570
23	0.1540	3/8	3	SA0111540	SA0111540
24	0.1520	3/8	3	SA0111520	SA4111520
25	0.1495	3/8	3	SA0111495	SA4111495
26	0.1470	3/8	3	SA0111470	SA0111470
27	0.1440	3/8	3	SA0111440	SA4111440
28	0.1405	3/8	3	SA0111405	SA4111405
29	0.1360	3/8	3	SA0111360	SA4111360
30	0.1285	3/8	3	SA0111285	SA4111285
31	0.1200	3/8	2-1/2	SA0111200	SA4111200
32	0.1160	3/8	2-1/2	SA0111160	SA4111160

## ◆ Threaded Shank Drills

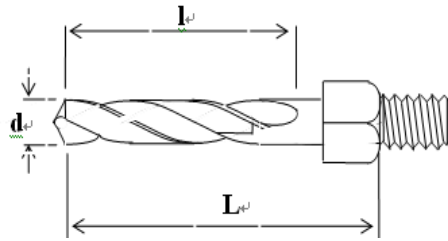


- ◆ Very Stubby & Extra Long
- ◆ NAS965 Threaded Shank Drill
- ◆ Material: HSS-M2 & Cobalt-M35
- ◆ Split point: 118° or 135°
- ◆ Surface finish: Black



Drill Size	Decimal Equiv.	O.A.L. VERY STUB.	O.A.L. EXTRA LONG	Part Number VERY STUB.	Part Number EXTRA LONG
33	0.1130	3/8	2-1/2	SA0111130	SA4111130
34	0.1110	3/8	2-1/2	SA0111110	SA4111110
35	0.1100	3/8	2-1/2	SA0111100	SA4111100
36	0.1065	3/8	2-1/2	SA0111065	SA4111065
37	0.1040	3/8	2-1/2	SA0111040	SA4111040
38	0.1015	3/8	2-1/2	SA0111015	SA4111015
39	0.0995	3/8	2-1/2	SA0110995	SA4110995
40	0.0980	3/8	2-1/2	SA0110980	SA4110980
41	0.0960	3/8	N/A	SA0110960	SA4110950
42	0.0935	3/8	N/A	SA0110935	SA4110935
43	0.0890	3/8	N/A	SA0110890	SA4110890
44	0.0860	3/8	N/A	SA0110860	SA4110860
45	0.0820	3/8	N/A	SA0110820	SA4110820
46	0.0810	3/8	N/A	SA0110810	SA4110810
47	0.0785	3/8	N/A	SA0110785	SA4110785
48	0.0760	3/8	N/A	SA0110760	SA4110785
49	0.0730	3/8	N/A	SA0110730	SA0110730
50	0.0700	3/8	N/A	SA0110700	SA4110700
51	0.0670	3/8	N/A	SA0110670	SA4110670
52	0.0635	3/8	N/A	SA0110635	SA4110635
53	0.0595	3/8	N/A	SA0110595	SA4110595
54	0.0550	3/8	N/A	SA0110550	SA4110550
55	0.0520	3/8	N/A	SA0110520	SA4110520
56	0.0465	3/8	N/A	SA0110465	SA4110465
57	0.0430	3/8	N/A	SA0110430	SA4110430
58	0.0420	3/8	N/A	SA0110420	SA4110420
59	0.0410	3/8	N/A	SA0110410	SA4110410
60	0.0400	3/8	N/A	SA0110400	SA4110400


## ◆ Threaded Shank Drills

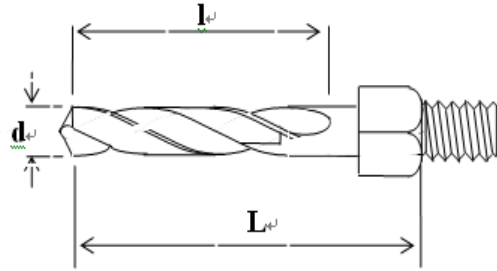

- ◆ Very Stubby & Extra Long
- ◆ NAS965 Threaded Shank Drill
- ◆ Material: HSS-M2 & Cobalt M35
- ◆ Split point: 118° or 135°
- ◆ Surface finish: Black

Drill Size	Decimal Equiv.	O.A.L. VERY STUB.	O.A.L. EXTRA LONG	Part Number VERY STUB.	Part Number EXTRA LONG
1/16	0.0625	3/8	3	SA0110625	SA4110625
5/64	0.0781	3/8	3	SA0110781	SA4110781
3/32	0.0938	3/8	3	SA0110938	SA4110938
7/64	0.1094	3/8	3	SA0111094	SA4111094
1/8	0.1250	3/8	3	SA0111250	SA4111250
9/64	0.1406	3/8	3	SA0111406	SA4111406
5/32	0.1562	3/8	3	SA0111562	SA4111562
11/64	0.1719	3/8	3	SA0111719	SA4111719
3/16	0.1875	3/8	3	SA0111875	SA4111875
13/64	0.2031	3/8	3	SA0112031	SA4112031
7/32	0.2188	3/8	3	SA0112188	SA4112188
15/64	0.2344	3/8	3	SA0112344	SA4112344
1/4	0.2500	3/8	3	SA0112500	SA4112500
17/64	0.2656	N/A	3	SA0112656	SA4112656
9/32	0.2812	N/A	3	SA0112812	SA4112812
19/64	0.2969	N/A	3	SA0112969	SA4112969
5/16	0.3125	N/A	3	SA0113125	SA4113125
21/64	0.3281	N/A	3	SA0113281	SA4113281
11/32	0.3438	N/A	3	SA0113438	SA4113438
23/64	0.3594	N/A	3	SA0113594	SA4113594
3/8	0.3750	N/A	3	SA0113750	SA4113750
25/64	0.3906	N/A	3	SA0113906	SA4113906
13/32	0.4062	N/A	3	SA0114062	SA4114062
27/64	0.4219	N/A	3	SA0114219	SA4114219
7/16	0.4375	N/A	3	SA0114375	SA4114375
29/64	0.4531	N/A	3	SA0114531	SA4114531
15/32	0.4688	N/A	3	SA0114688	SA4114688
31/64	0.4844	N/A	3	SA0114844	SA4114844
1/2	0.5000	N/A	3	SA0115000	SA4115000

## ◇ Threaded Shank Drills

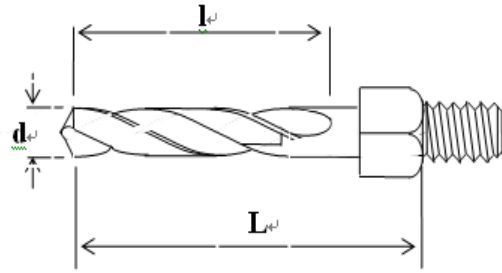

- ◆ Very Stubby & Extra Long
- ◆ NAS965 Threaded Shank Drill
- ◆ Material: HSS-M2 & Cobalt M35
- ◆ Split point: 118° or 135°
- ◆ Surface finish: Black



Drill Size	Decimal Equiv.	O.A.L. VERY STUB.	O.A.L. EXTRA LONG	Part Number VERY STUB.	Part Number EXTRA LONG
A	0.2340	3/8	3	SA0112340	SA4112340
B	0.2380	3/8	3	SA0112380	SA4112380
C	0.2420	3/8	3	SA0112420	SA4112420
D	0.2460	3/8	3	SA0112460	SA4112460
E	0.2500	3/8	3	SA0112500	SA4112500
F	0.2570	3/8	3	SA0112570	SA4112570
G	0.2610	N/A	3	SA0112610	SA4112610
H	0.2660	N/A	3	SA0112660	SA4112660
I	0.2720	N/A	3	SA0112720	SA4112720
J	0.2770	N/A	3	SA0112770	SA4112770
K	0.2810	N/A	3	SA0112810	SA4112810
L	0.2900	N/A	3	SA0112900	SA4112900
M	0.2950	N/A	3	SA0112950	SA4112950
N	0.3020	N/A	3	SA0113020	SA4113020
O	0.3160	N/A	3	SA0113160	SA4113160
P	0.3230	N/A	3	SA0113230	SA4113230
Q	0.3320	N/A	3	SA0113320	SA4113320
R	0.3390	N/A	3	SA0113390	SA4113390
S	0.3480	N/A	3	SA0113480	SA4113480
T	0.3580	N/A	3	SA0113580	SA4113580
U	0.3680	N/A	3	SA0113680	SA4113680
V	0.3770	N/A	3	SA0113770	SA4113770
W	0.3860	N/A	3	SA0113860	SA4113860
X	0.3970	N/A	3	SA0113970	SA4113970
Y	0.4040	N/A	3	SA0114040	SA4114040
Z	0.4130	N/A	3	SA0114130	SA4114130