

SABRE AIRCRAFT TOOLS

Flat Offset Pistol Drills


SMX2PD Series 0.4HP (0.30KW) Non-Reversible

Model Number Spindle Thread		Free Speed RPM	Weight lbs/kg	Length inch/mm Short
1/4"-28	9/32"-40			
S12355	S12356	4,500	1.7lbs (0.77kg)	7.25" (184mm)
S12357	S12358	3,000	1.7lbs (0.77kg)	7.25" (184mm)
S12359	S12360	800	1.9lbs (0.86kg)	9.0" (227mm)
S12361	S12362	500	1.9lbs (0.86kg)	9.0" (227mm)

Model Number Spindle Thread		Free Speed RPM	Weight lbs/kg	Length inch/mm Medium
1/4"-28	9/32"-40			
S12363	S12364	4,500	1.8lbs (0.82kg)	7.25" (184mm)
S12365	S12366	3,000	1.8lbs (0.82kg)	7.25" (184mm)
S12367	S12368	800	2.0lbs (0.9kg)	9.0" (227mm)
S12369	S12370	500	2.0lbs (0.9kg)	9.0" (227mm)

Model Number Spindle Thread		Free Speed RPM	Weight lbs/kg	Length inch/mm Long
1/4"-28	9/32"-40			
S12371	S12372	4,500	1.9lbs (0.86kg)	7.25" (184mm)
S12373	S12374	3,000	1.9lbs (0.86kg)	7.25" (184mm)
S12375	S12376	800	2.1lbs (0.95kg)	9.0" (227mm)
S12377	S12378	500	2.1lbs (0.95kg)	9.0" (227mm)

Attachment #		Ref Length	Dimensions		
1/4"-28	9/32"-40		A	B	C
SPA40225	SPA40226	Short	2.49" (63.14mm)	2.44" (62mm)	4.8" (122.20mm)
SPA40235	SPA40236	Medium	3.83" (97.30mm)	3.79" (96.16mm)	6.2" (156.36mm)
SPA40245	SPA40246	Long	5.18" (131.46mm)	5.13" (130.32mm)	7.5" (190.52mm)

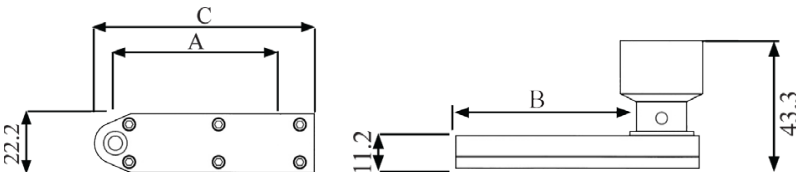

Safety Precaution: Read and follow all safety and operating instructions.
WARNING: Face and eye protections must be worn while operating power tools, per ANSI B186.1

Products and specifications subject to change without prior notice.



www.sabretools.com
 info@sabretools.com